

## PITONS À OEIL ACIER PAO

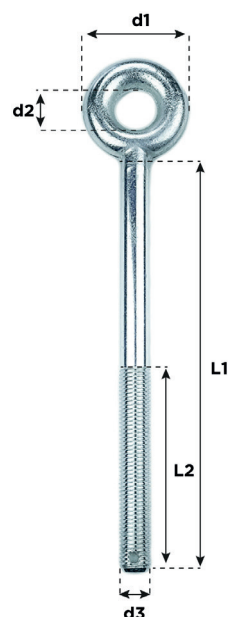


Tableau des mesures

Code	Charge de rupture	Câble	d1	d2	d3	L1	L2	Poids
	t	ø mm	mm	mm	mm	mm	mm	Kg
PAO12/115/110	4,3	6-8	50	26	M12	115	110	0,076
PAO12/235/60	4,3	6-8	50	26	M12	235	60	0,278
PAO12/325/150	4,3	6-8	50	26	M12	325	150	0,337
PAO12/500/150	4,3	6-8	50	26	M12	500	150	0,443
PAO14/125/110	4,4	8	42	18	M14	125	110	0,211
PAO16/140/130	6	9-11	46	20	M16	140	130	0,297
PAO16/243/120	8	9-11	51,4	22	M16	243	120	0,538
PAO16/324/200	8	9-11	51,4	22	M16	324	200	0,589
PAO16/474/200	8	9-11	51,4	22	M16	474	200	0,782
PAO18/155/140	7,6	9-11	52	22	M18	155	140	0,418
PAO20/166/155	10	12-13	57	25	M20	166	155	0,537
PAO20/256/120	12,4	12-13	67,6	27,7	M20	256	120	0,897
PAO20/316/200	12,4	12-13	67,6	27,7	M20	316	200	1,039
PAO20/416/200	12,4	12-13	67,6	27,7	M20	416	200	1,247
PAO24/417/150	17,9	16	65	27	M24	417	150	1,572